




# WYO-VIS<sup>®</sup>



With its fast acting high performance formula, WYO-VIS<sup>®</sup> quickly builds viscosity and shields clay and shale formations. Typical treatment levels for fresh water drilling fluids are .25 – 1.5 quarts/100 gallons of water, depending upon the desired viscosity or level of shale stabilization required. WYO-VIS<sup>®</sup> builds sufficient viscosity drilling fluids to effectively clean the hole. In addition, WYO-VIS<sup>®</sup> stabilizes problem shale and imparts friction reducing properties to the fluid. For best results, mix EXTRA HIGH YIELD<sup>™</sup> GEL to a funnel viscosity of 35–40 seconds per quart, and then add WYO-VIS<sup>®</sup> to bring viscosity to 45–50 seconds per quart.

WYO-VIS<sup>®</sup> provides the following advantages at *low* application rates:

- **Builds viscosity fast**
- **Prevents bit balling**
- **Shields swelling clays**
- **Reduces torque**

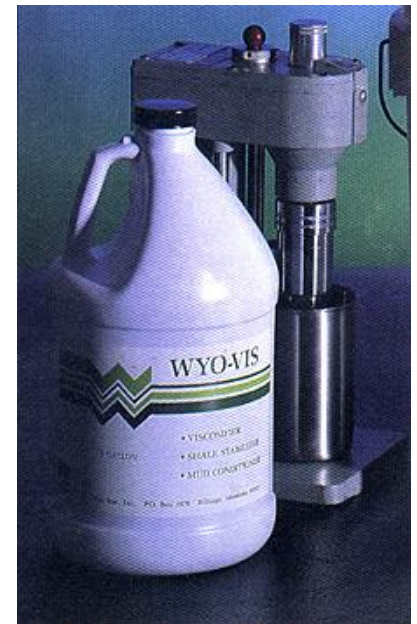

## APPLICATION RATES:

- For addition during air drilling operations for shale stabilization or stiff foam, WYO-VIS<sup>®</sup> can be mixed at a rate of .25 to .75 quarts per 100 gallons of water and used in conjunction with AIR FOAM<sup>®</sup> and WYO-FOAMER<sup>™</sup>.
- WYO-VIS<sup>®</sup> can be thinned and broken down with sodium hypochlorite (bleach).

**WYO-VIS<sup>®</sup> is available in 42 lb pails.**